This is the normal working configuration PC with PLC

PC

USB-mini

Plc
Mitsubishi L02-serie

PC side I/F Serial setting ✕

○ RS-232C   OK

● USB   Cancel

                   Setup...
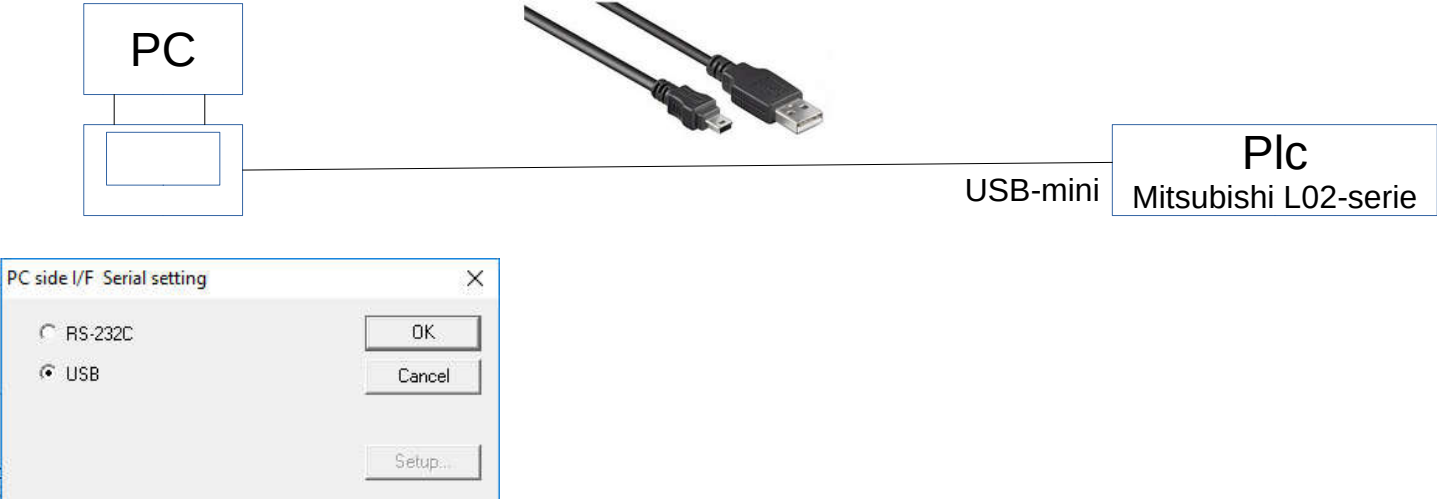
Configuration with CSE H21 for remote access of the PLC

PC

WAN

CSE
H21

USB-mini

Plc
Mitsubishi L02-serie

PC side I/F Serial setting ✕

● RS-232C   OK

○ USB   Cancel

COM port   COM 10 ▼
                   Setup...
Transmission speed 9.6Kbps ▼

Transfer Setup: PC side I/F Serial Setting ✕

Parity   Even ▼   OK

Data Bits 7bits ▼   Cancel

Stop Bits 1bit ▼   Default
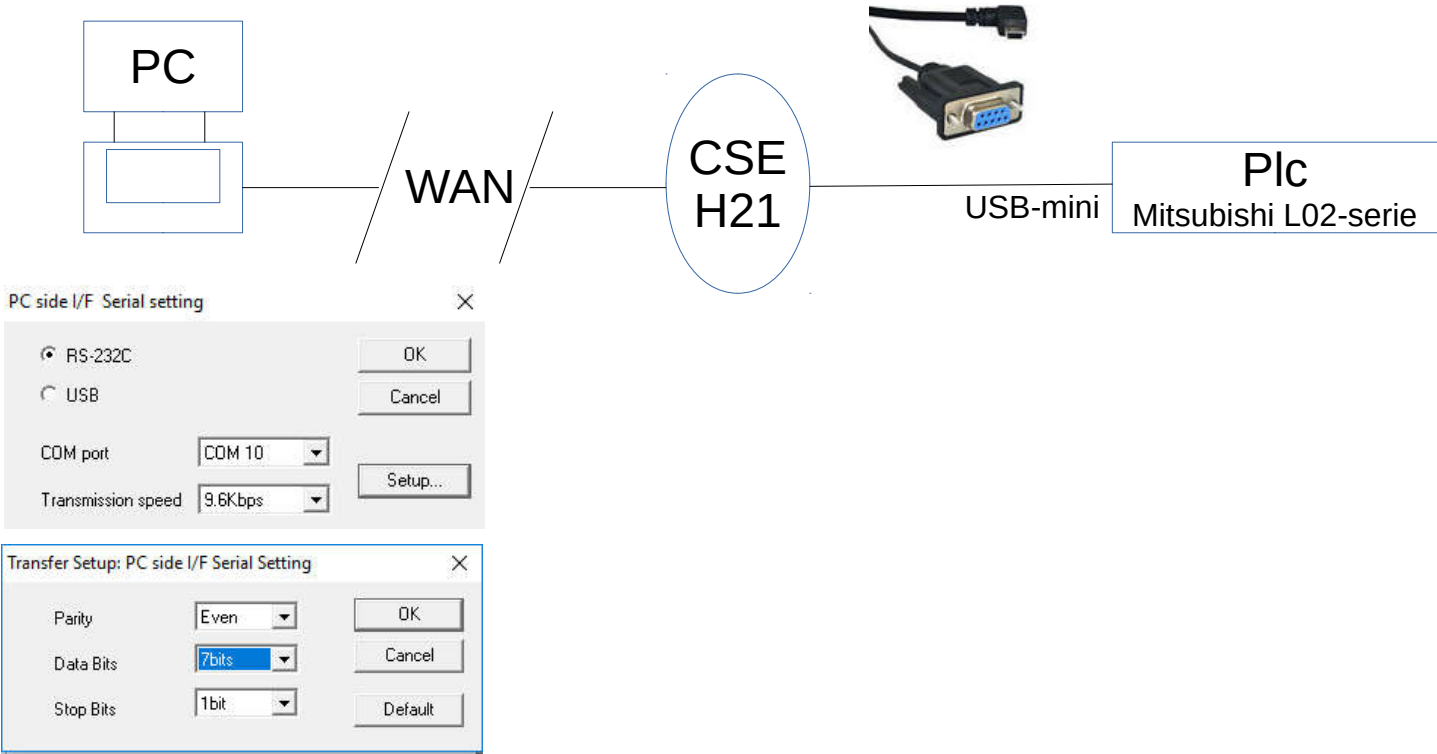
We have a connected CSE, but we cannot connect the PLC remote.

I hope you have a explanation.