


ITEM: USBAM-USBBM-D-2M-BLACK


NO	Drawing	Date	Ver.	Change Records
1	Huang	2014-01-09	A	初始制作
2				



Conn. 1 USB2. 0 AM

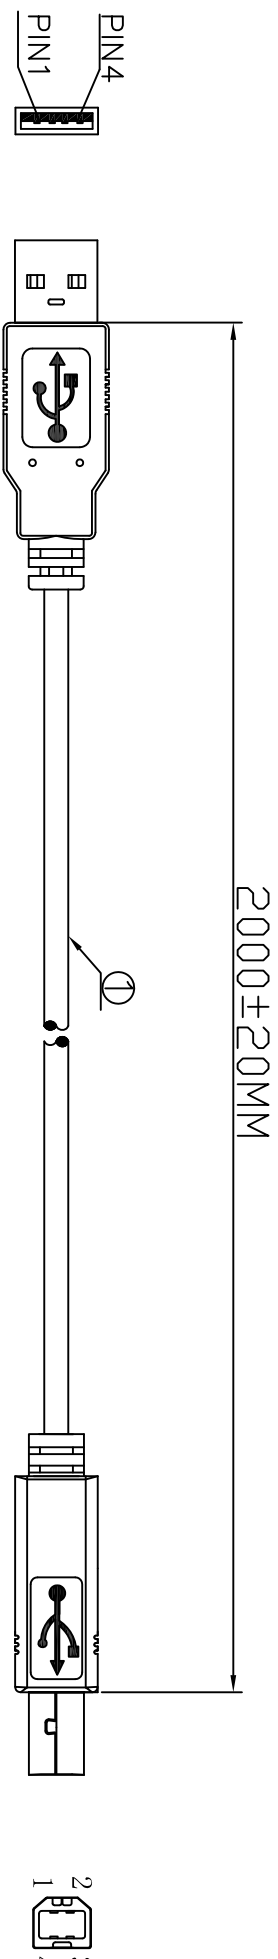

Conn. 2 USB 2. 0 BM

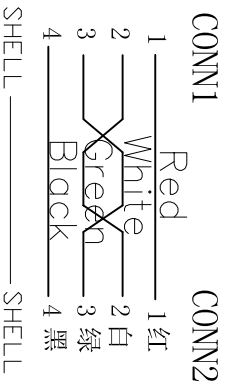1. Contact Figure(接点图)



2. ELECTRICAL PROPERTIES (电气测试条件):

- A. Hi-Pot: 300V (电压: 300V)
- B. Contact Resistance: 5Ω (导通阻抗: 5Ω)
- C. Insulation Resistance: 5MΩ (绝缘阻抗: 5MΩ)

		Shenzhen Hongkai Electronics co., LTD 深圳市鸿凯电子有限公司	
Customer	Item No.	Page	Unit
客户	客户料号	页码	mm
Drawing	Item Name	Rate	
绘制	品名规格	比例	
Check	Drawing NO.	Ver.	Unit
审核	图纸编号	版本	mm
Approved	Date	PartNO.	
核准	制作日期	客户	

No.	Name	Specification	Dosage	Unit
序号	材料名称	规格描述	用量	单位
1	Cable	28AWG*1P+24AWG*2C+AL+B OD: 4.5 COLOUR: BLACK	1	PC
2	Connector	USB A Male, Nickel Plated	1	PC
3	Connector	USB B Male, Nickel Plated	1	PC
4	Outer Mold	45P PVC COLOUR: BLACK	1	g
5	Packings	45P 黑色PVC插头料		
6		圆形, PE袋		